

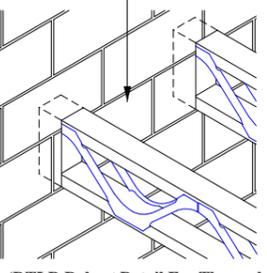
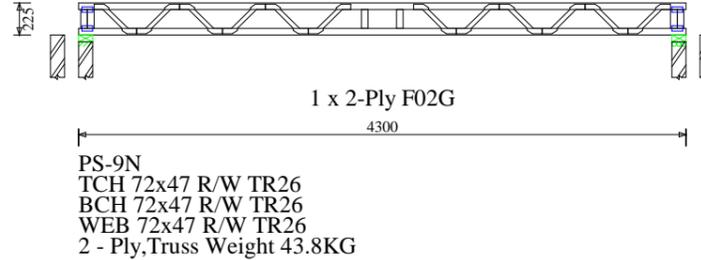
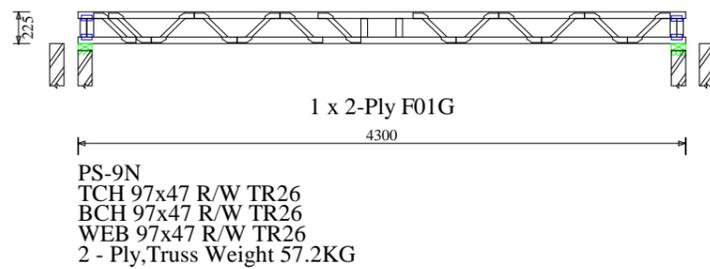
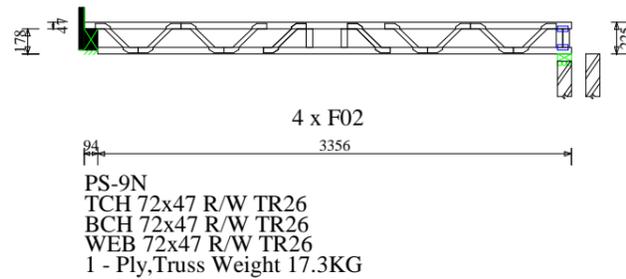


Blockwork to continue between beams to provide restraint

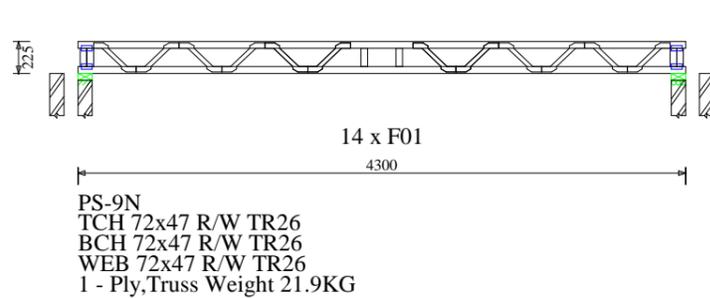

(DTLR Robust Detail For Thermal Bridging should be observed)

**BOTTOM CHORD BUILT INTO MASONRY**

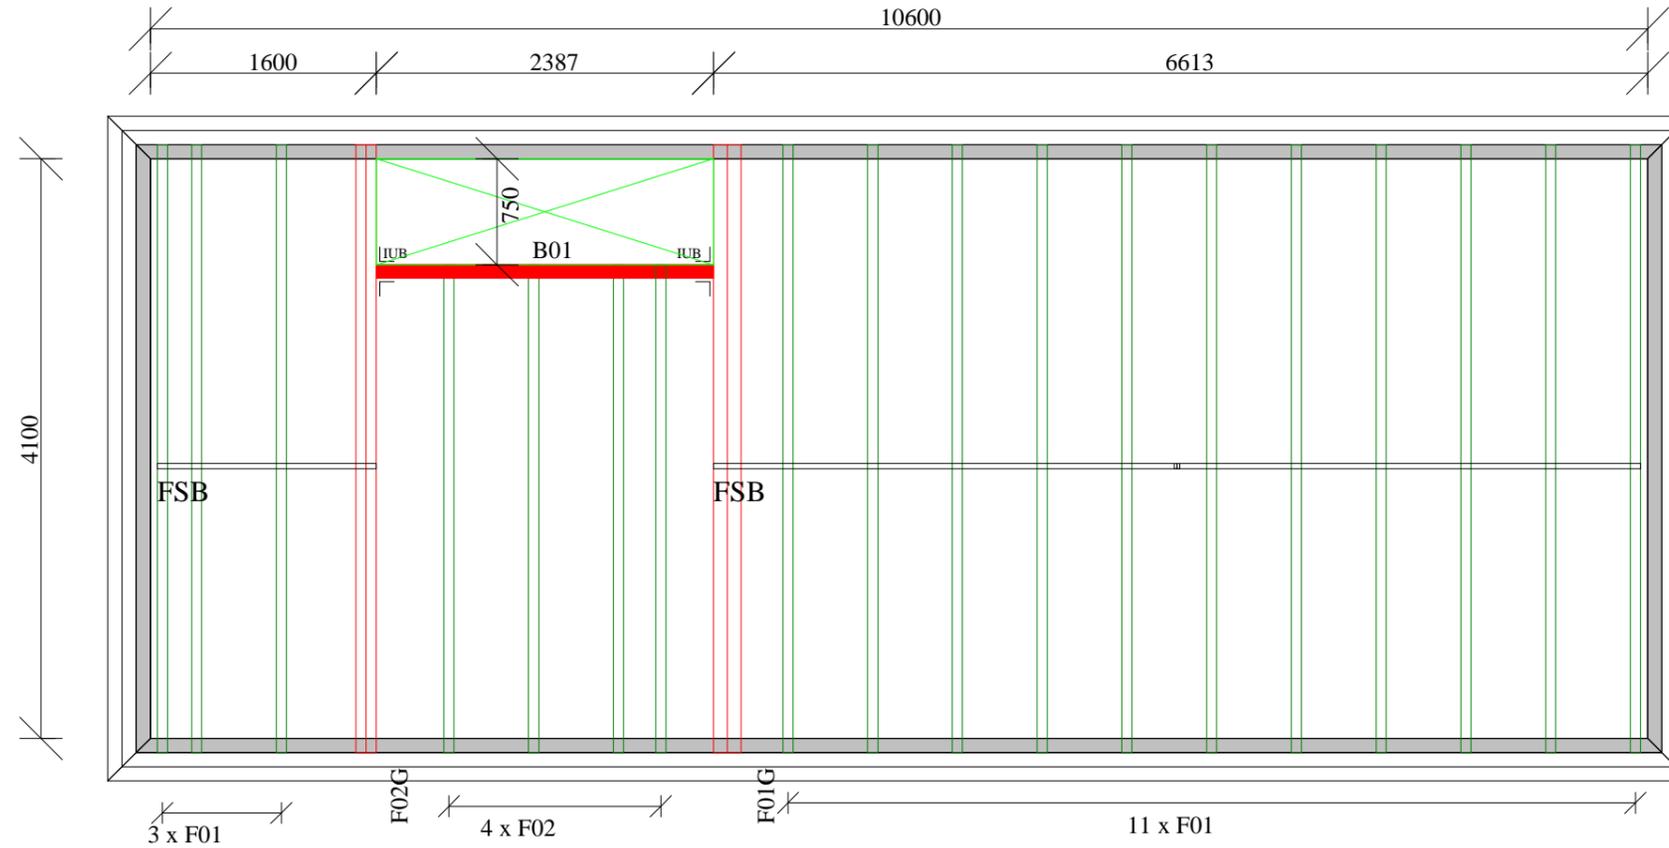

**NOTES**

1. JOB SPECIFICATION

All POSI Beams are spaced at 600mm max centres unless otherwise marked.

Loading - Floor Top Dead 0.205 kN/m<sup>2</sup>  
 Floor Top Live 1.5 kN/m<sup>2</sup>  
 Partition Load 0.220 kN/m<sup>2</sup>  
 Floor Bottom 0.205 kN/m<sup>2</sup>

2. This drawing is to be read in conjunction with all other design, architectural and contract documentation issued on this project.

3. This drawing is intended to identify the main features and principal components. Construction work should be carried out and supervised by experienced and competent personnel and hence exhaustive detail is not required.

4. Beam specification

The specification for beam design is shown on the body drawings and calculation sheets which are to be read in conjunction with this drawing.

5. Timber specification

Sectional sizes of timber are generally referred to as nominal. They comply with British Standard recommendations.

REVISION



Howarth Timber Engineering Solutions Ltd  
 Howarth House  
 Hollow Road  
 Bury St Edmunds  
 Suffolk  
 IP32 7QW

Phone: 01284 772 700

Fax: 0844 801 2321

Email: smeacham@howarth-timber.co.uk

CLIENT

Cadtech

TITLE

Howarth House  
 Hollow Road

B17643A

SPACING

SCALE

NTS

DATE

07/04/15

DRAWN

Steve Meacham

CHECKED

Steve Meacham

DRAWING No..

B17643A

REV.