


AMBICHIPBOARD SYSTEM

JOISTED FLOOR CONSTRUCTION

ambiente®

more than underfloor

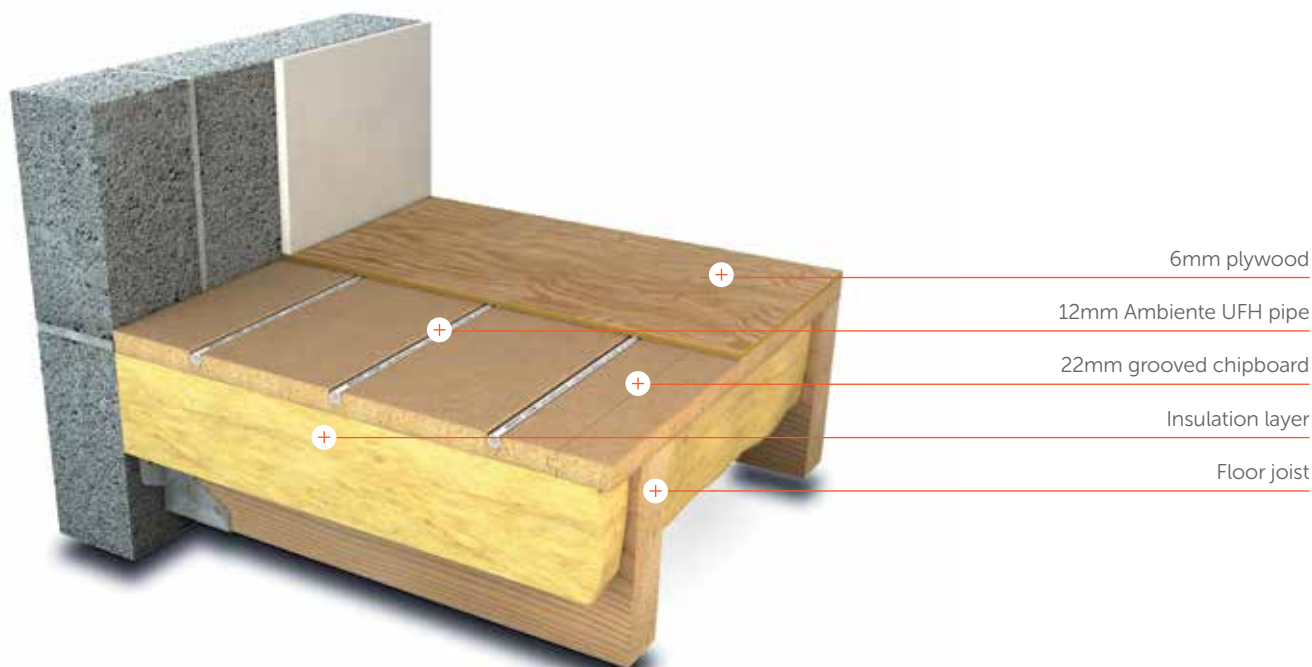

PRODUCT OVERVIEW

The AmbiChipboard system is a unique combination of a structural floor solution, while incorporating underfloor heating. It consists of high grade moisture-resistant tongue/grooved chipboard panels, that are pre-routed to take 12mm UFH pipework. Pipework channels are routed typically at 150mm spacings, with radius returns and transit channels to facilitate installation. Often the tail/transit pipework is run beneath the floor in the joist void to minimise the need for any further routing of the boards.

Ambiente recommend the use of a 6mm ply (or cement-based alternative) to be laid over the system before laying the floor finish.

Universal panel with pre-grooved return channels



18mm Option needs 18mm Ply or OSB underneath for strength.

If joists are a problem with laying at 90 degrees, noggins at 300mm centres can be used to allow any orientation.

10004A|0415-040