

# Edge Trim Application

## AT195Int/AT195Ext




### Application Instructions

The AT195 Internal and External trim is used wherever the laminate needs to cover an area which continues perpendicular to another laminated surface. The AT195 Ext is supplied with a high-adhesion finish on its outer face and should be used for capping applications. The AT195 Int trim is supplied with a high-adhesion finish on its inner face and should be used for internal corners. The trim should be nailed at both edges if possible. Always bandage over the joint between where the nails penetrate the trim and the decking before applying the laminate.


### Trim Details

AT195 Ext: External angle trim. AT195 Int: Internal angle trim.

Supplied in 3m lengths

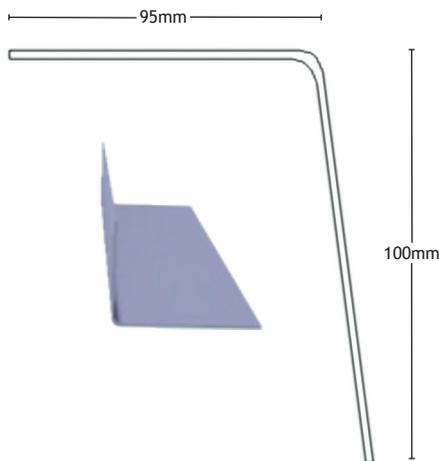

AT195 Int

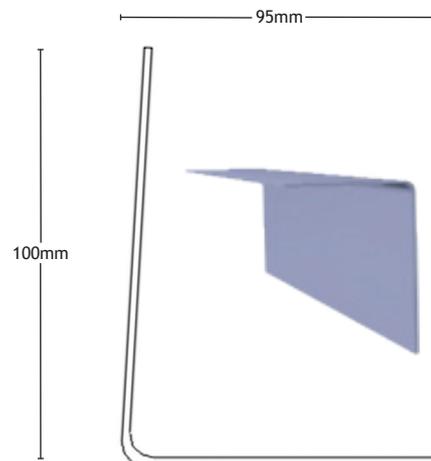

AT195 Ext

### AT195 Typical application

