


STR HT 2003/2W

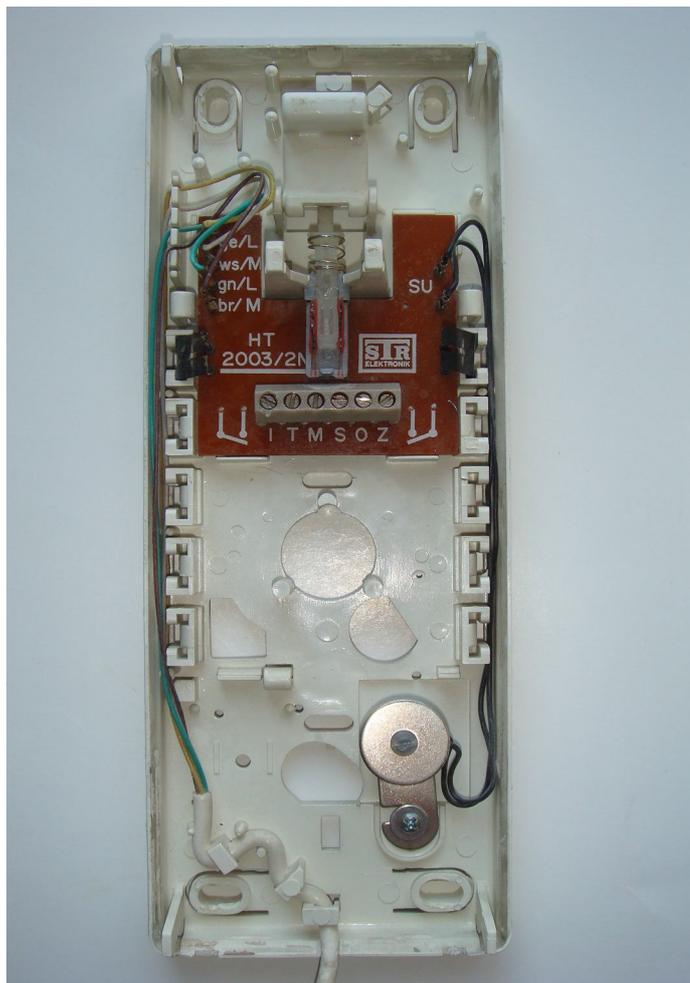

Terminals


- 1** Lock
- M** Speech Out (Mic)
- O** Common
- T** Speech In (Speaker)
- S** Call

Discontinued, replaced with HT3003/2W

IMPORTANT NOTE :

- 1) Before replacing the handset make note of the wires to each terminal on the existing unit (an easy way is to cut each core off leaving a piece of the insulation in place with colour visible) twist unused cores together (so you know they are not used, do not short them out).
- 2) Some older systems will have cable with one coloured core and a solid white core in this case mark each core with a marker or tape.
- 3) Some systems may have loop on wiring, you will have 2 cables into your handset (make sure any joins remain, as these may be serving other flats on the system).

Wiring Diagram 1 Way

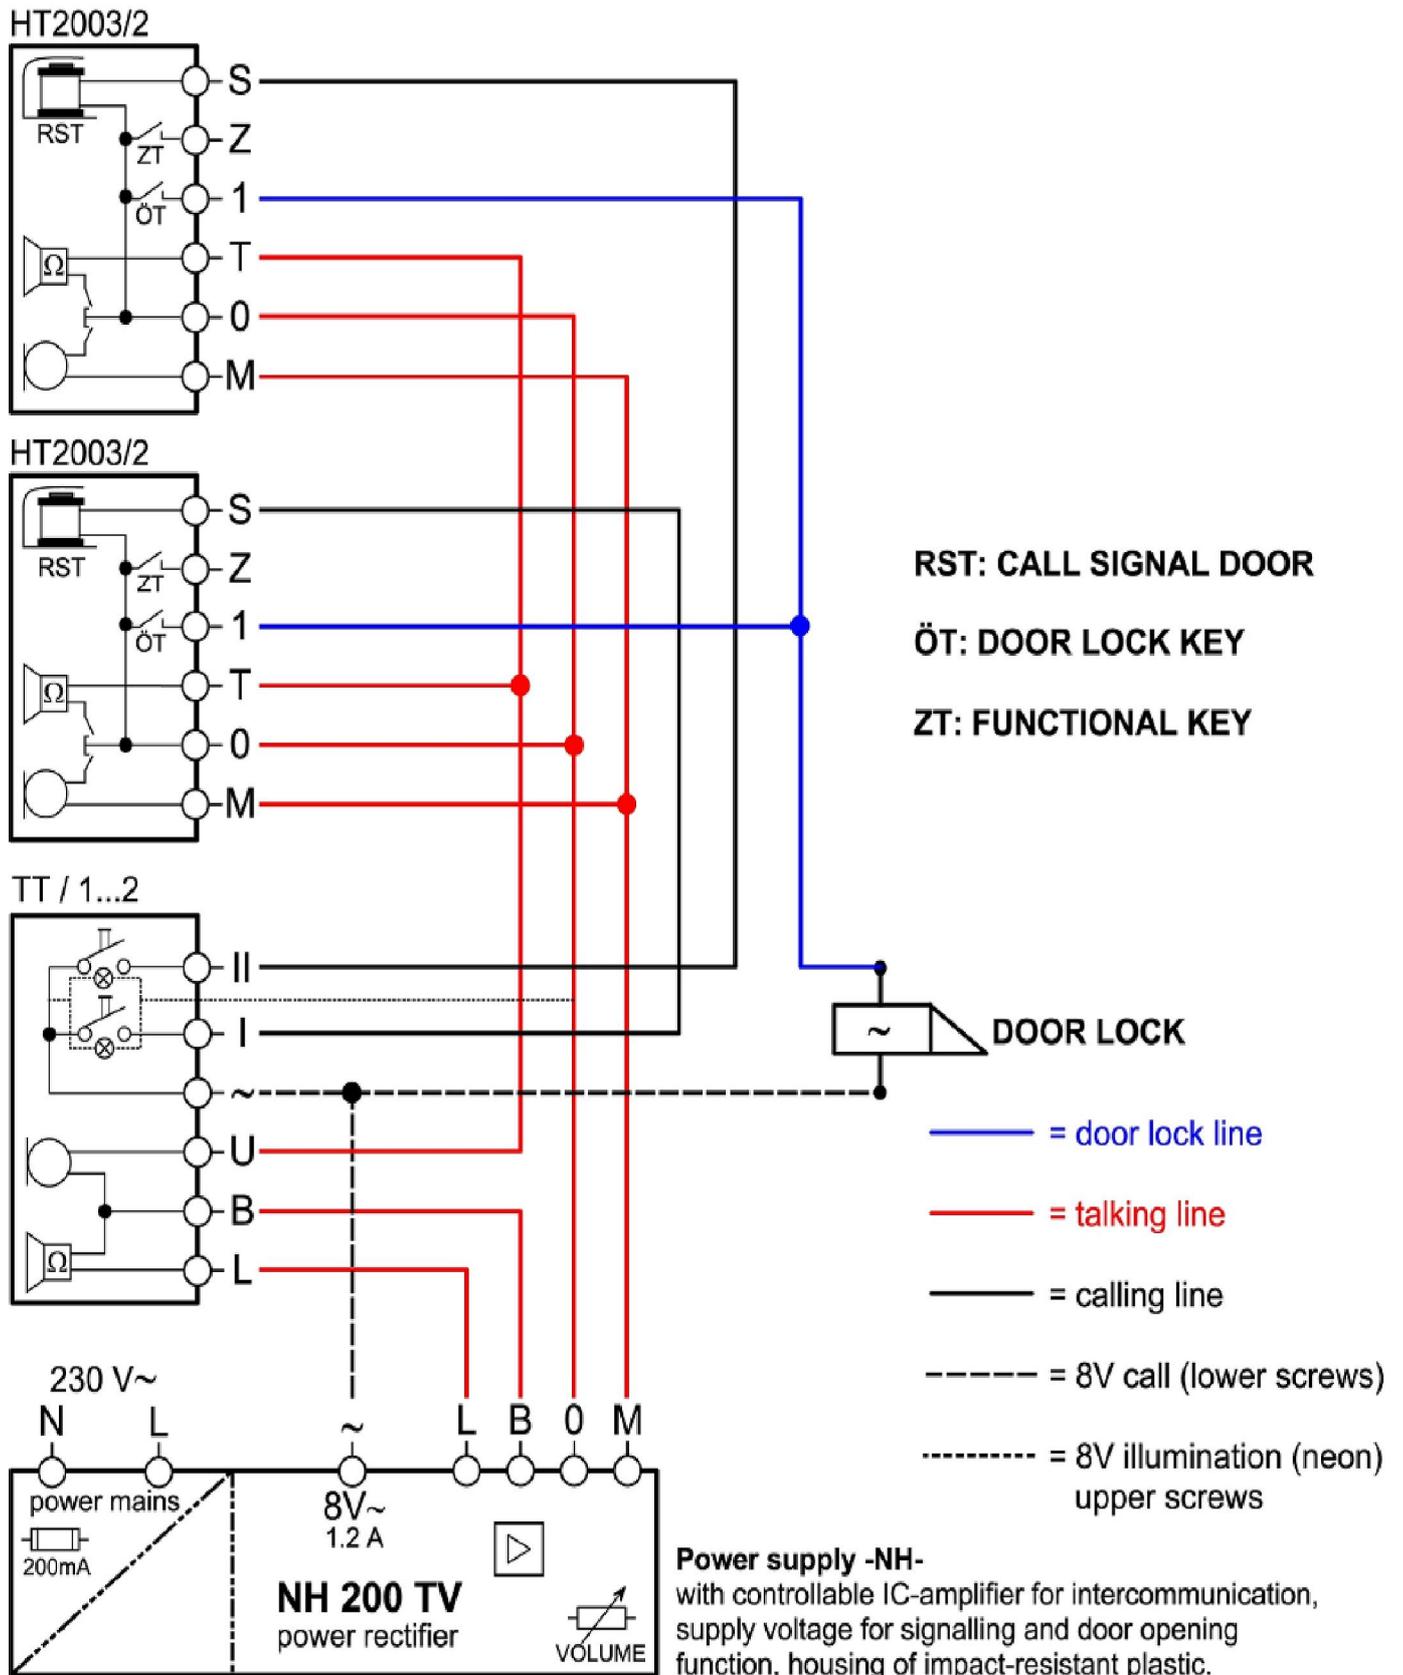

2 Entrance System Wiring

